

- Input voltage: AC 90~264V, Input frequency: 47~63 Hz
- Inrush current: 40A@ 230VAC Cold Start
- Constant voltage type Voltage tolerance:±5%
- Build-in OCP OVP SCP, thermal protection and over power protection, lightning surge 4KV above;
- With waterproof, dampproof and dustproof: IP67
- Withstand voltage: Input to Output./ input to earth 3.0KV
- Work stable for 50kH under -40°C ~ +70°C
- CE Approval, Rohs compliance

Highly reliable high-power LED lamps (light tunnel) Power Supply - LED driver solution for your power Unstable trouble

First, product characteristics (military power design patented technology - the global leader):

1. Standby power consumption of small, efficiency as high as 95%, power factor as high as 0.99, the real implementation of a highly efficient energy-saving.
2. The application of new materials and new technologies, achieve its small size, light weight, green environmental protection features, at -40 °C - +70°C temperature working life of up to 50,000 hours or more.
3. The application of new technologies to achieve a high precision constant current, harmonic small, to achieve consistent quality, high reliability.
4. Product achieve modular, standardized, easy to install and maintain.
5. Energy-saving intelligent control: temperature control, time control, PWM control carrier.



~~Voltage Model~~ ~~Download:~~ ~~Output Input~~ ~~Power~~ ~~DC~~ 1A




~~Voltage Model~~ ~~Download:~~ ~~Output Input~~ ~~Power~~ ~~DC~~ 1.5A



~~Voltage Model~~ ~~Download:~~ ~~Output Input~~ ~~Power~~ ~~DC~~ 2A



~~Voltage Model~~ ~~Download:~~ ~~Output Input~~ ~~Power~~ ~~DC~~ 2.5A

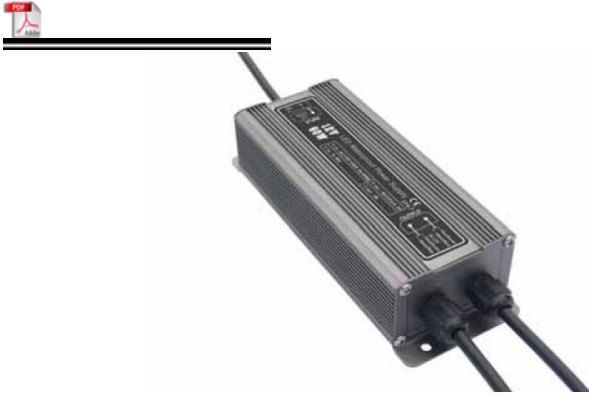

~~Voltage Model~~ ~~Download:~~ ~~Output~~ ~~Power~~ ~~DC~~ 5A



~~Voltage Model~~ ~~Download:~~ ~~Output~~ ~~Power~~ ~~DC~~ 8.3A



~~Voltage Model~~ ~~Download:~~ ~~Output~~ ~~Power~~ ~~DC~~ 12.5A